

Please cite the Published Version

Symeonakis, Ilias (2015) Multi-temporal Soil Erosion Modelling over the Mt Kenya Region with Multi-Sensor Earth Observation Data. In: EGU General Assembly 2015, 12 April 2015 - 17 April 2015, Vienna, Austria.

Publisher: EGU

Downloaded from: <https://e-space.mmu.ac.uk/622281/>

Usage rights: © In Copyright

Additional Information: Poster and abstract.

Enquiries:

If you have questions about this document, contact openresearch@mmu.ac.uk. Please include the URL of the record in e-space. If you believe that your, or a third party's rights have been compromised through this document please see our Take Down policy (available from <https://www.mmu.ac.uk/library/using-the-library/policies-and-guidelines>)



Multi-temporal Soil Erosion Risk Modelling over Kenya with Multi-Sensor Earth Observation & Ancillary Data

Elias Symeonakis

School of Science and the Environment, Manchester Metropolitan University, UK
E.Symeonakis@mmu.ac.uk



http://www.nationsonline.org/oneworld/map/kenya_map2.htm


11

Rationale

- Accelerated soil erosion is the principal cause of soil degradation across the world. In Africa, it is seen as a serious problem creating negative impacts on agricultural production, infrastructure and water quality
- In Kenya, soil erosion and land degradation have become major environmental concerns and present a formidable threat to food security and sustainability of agricultural production. Over the period 1981–2003, despite improvements in woodland and grassland, productivity declined across 40% of cropland – a critical situation in the context of a doubling of the human population over the same period
- Traditionally, soil losses by water erosion have been estimated using runoff plot measurements and a wide range of erosion models. The runoff plot experiments are not only resource demanding to undertake but also are site-specific and only quantify factors that are responsible for erosion processes (Mutchler et al., 1994, Morgan, 1996 and Stroosnijder, 2003)
- It is important that a soil erosion monitoring system for Kenya is in place in order to understand the magnitude of, and be able to respond to, the increasing number of demands on this renewable resource
- We propose a methodology for the mapping of sheet-wash soil erosion risk on a yearly time-step using multi-temporal & multi-sensor Earth Observation & ancillary data in a GIS

Data

- SOILS: ISRIC African SoilGrids, 250m**
 - Sand (%), silt (%), clay (%), organic matter (%) (Fig. 1 to 4)
- DEM: SRTM DEM, 90m (Fig. 5)**
- LAND COVER:**
 - MODIS **MOD44B Vegetation Continuous Fields** (sub-pixel-level representation of surface vegetation cover estimates), Yearly, **250m (Fig. 6)**
 - MODIS **MCD12Q1 Land Cover Type**, Yearly, **500m (Fig. 7)**
- PRECIPITATION:** University of Reading, TAMSAT **Meteosat**-based seasonal rainfall estimates (0.0375° = ~4km) (Fig. 8)

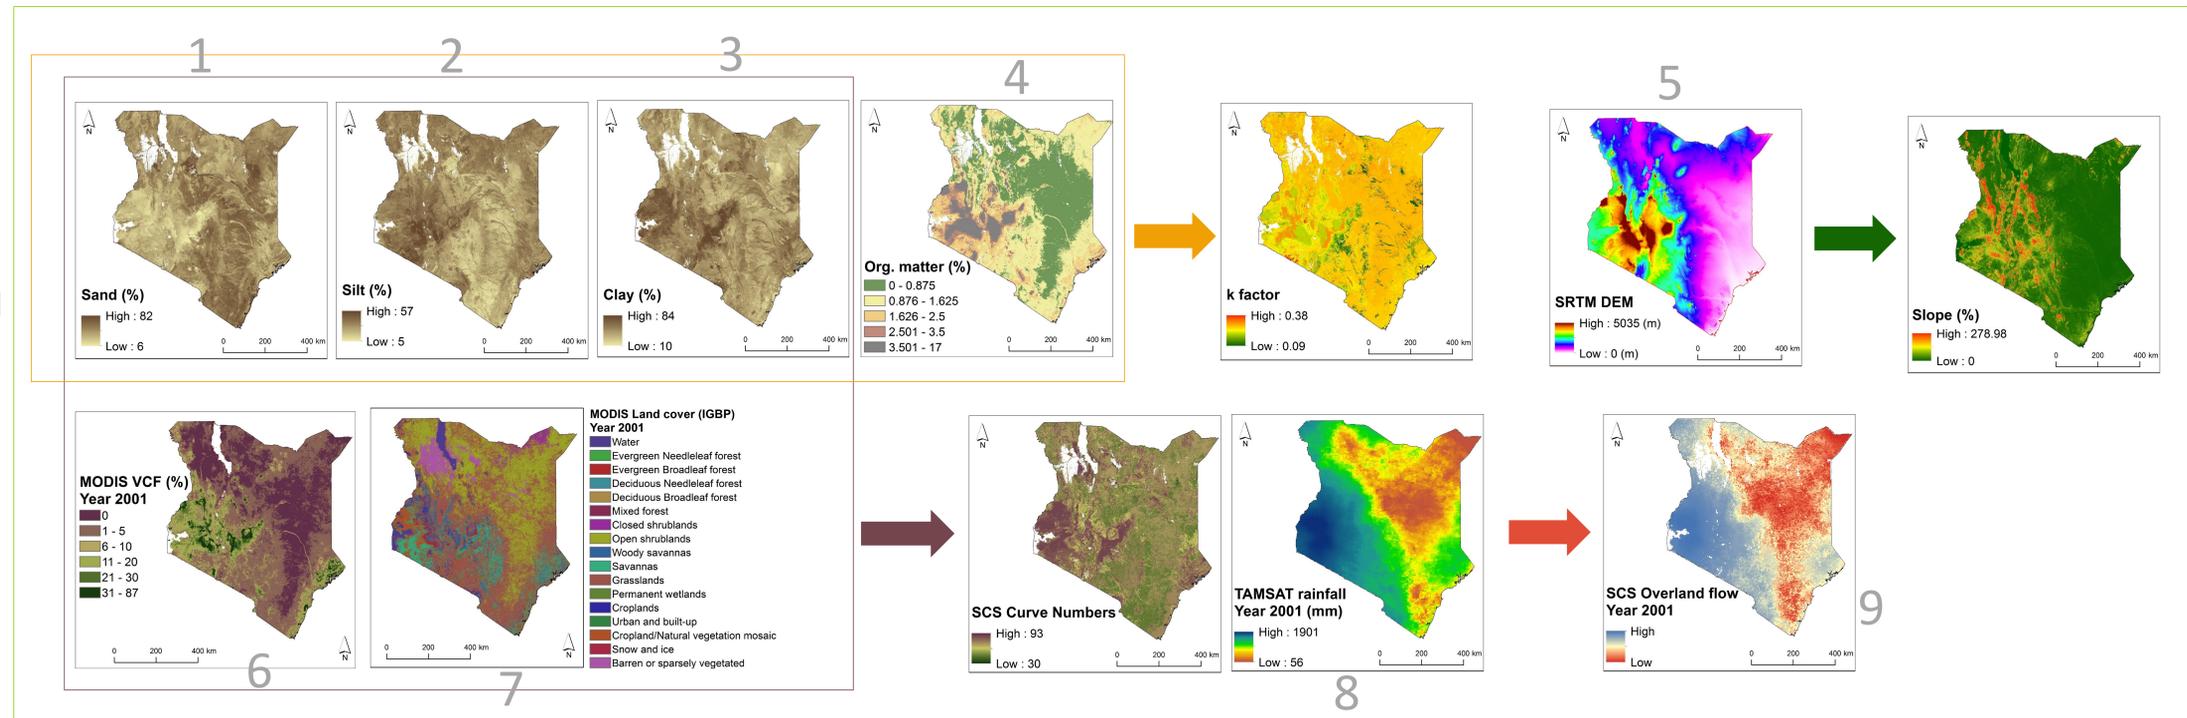

Period of study


- 10 years, 2001-2010, on a yearly basis

Methods (Symeonakis and Drake 2010)

- Thornes (1990) sheet-wash erosion and SCS (1972) overland flow models:

$$E = k Q^2 s^{1.67} e^{-0.07vc} \text{ (Fig. 10)}$$

E: erosion (mm)
K: soil erodibility coefficient
Q: overland flow (mm; SCS 1972; Fig. 9)
s: slope (%)
Vc: vegetation cover (%)

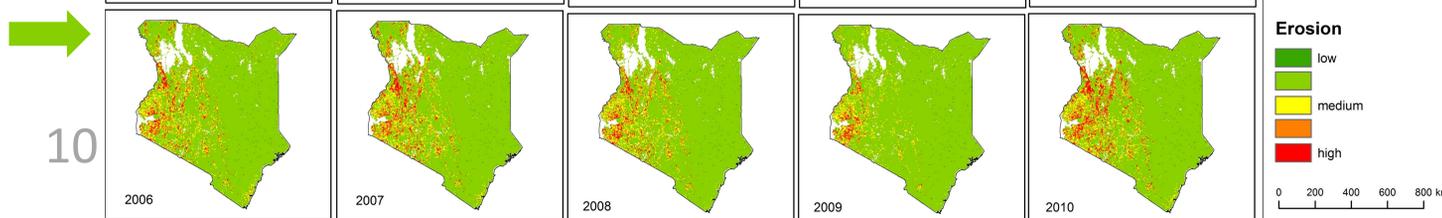

Results

Throughout the 10 years, the areas that are flagged as of higher risk from soil erosion are in the west of the country, specifically around (fig. 11):

- A: Nakuru, Kisii and Kericho**
- B: Lokori, Lokichar and Lodwar**
- C: Marigat, Lake Baringo and Maralal**

'Worse' year: 2010, 'best' year: 2009
Results in agreement with GLASOD data on 'loss of topsoil by water erosion: Wt' (Oldeman et al., 1992)

- Cross-tabulation of the severity and GLASOD subsets gave a significant Cramer's correlation coefficient of 0.78 (P << 0.005).

