


Please cite the Published Version

Tanoli, Shujaat Ali Khan, Khan, Mohammad Ismail, Fraz, Qaiser, Yang, Xiaodong and Shah, Syed Aziz  (2018) A Compact Beam-Scanning Leaky-Wave Antenna With Improved Performance. IEEE Antennas and Wireless Propagation Letters, 17 (5). pp. 825-828. ISSN 1536-1225

DOI: <https://doi.org/10.1109/lawp.2018.2817478>

Publisher: Institute of Electrical and Electronics Engineers (IEEE)

Version: Accepted Version

Downloaded from: <https://e-space.mmu.ac.uk/624433/>

Usage rights:  In Copyright

Additional Information: This is an Author Accepted Manuscript of an article published in IEEE Antennas and Wireless Propagation Letters.

Enquiries:

If you have questions about this document, contact openresearch@mmu.ac.uk. Please include the URL of the record in e-space. If you believe that your, or a third party's rights have been compromised through this document please see our Take Down policy (available from <https://www.mmu.ac.uk/library/using-the-library/policies-and-guidelines>)

A Compact Beam-Scanning Leaky-Wave Antenna With Improved Performance

Shujaat Ali Khan Tanoli, Mohammad Ismail Khan, Qaiser Fraz, Xiaodong Yang ^{ID}, Senior Member, IEEE, and Syed Aziz Shah ^{ID}

Abstract—A compact microstrip leaky-wave antenna (MLWA) with reduced sidelobe level and increased linear frequency-scanning capability is proposed in this letter. Symmetric Yagi-like elements are introduced, which reduce the sidelobe level by radiating the remaining power at the physical end of MLWA, and make the radiation plane (xz plane) symmetric. Defected ground plane is used to optimize the working of Yagi-like elements. Measured results show that the sidelobe is suppressed about 16 dB at 4.8 GHz. To further reduce the sidelobe level, improve frequency-scanning capability, and increase the gain, the leaky section of the antenna is tapered, and two slots of equal dimensions are introduced. The frequency beam scanning is improved compared with the conventional MLWAs by achieving a total beam scan of 78° (from broadside [12°] to endfire [90°]). The measurements performed on the fabricated prototype exhibit good agreement with simulations.

Index Terms—Beam scanning, microstrip leaky-wave antenna (MLWA), peak gain, sidelobe level (SLL).

I. INTRODUCTION

SINCE Hansen invented the first known leaky-wave antenna (LWA) in 1940 [1], it has attracted increasing attention in the research community because of its simple feeding network, high radiating directivity, and frequency-scanning capability [2]. Different types of uniform, quasi-uniform, and periodic LWAs with one-dimensional and two-dimensional radiation characteristics have been investigated and reported in the literature [3]–[5]. Despite owning many advantages, LWA still faces a major problem, which is the tradeoff between the backlobe and the length of the LWA. The first microstrip leaky-wave antenna (MLWA) proposed by Menzel [6] based on exciting first higher order mode (TE₀₁ mode) has a length of $2.23\lambda_0$ and radiates 65% of the power. The remaining power reflects from the open end of the LWA, resulting in a large backlobe. The length must

be increased to $4.85\lambda_0$ to radiate 90% of the power. To radiate the power more efficiently and suppress the backlobes, the length must be increased to $5\lambda_0$. The array topology in [3] suppresses backlobes up to 10.5 dB with a length of $2\lambda_0$. The backlobes are further suppressed to 15 dB, but with a length of 3λ by the tapered loaded LWA [4]. By adding parasitic elements to LWA [5], the backlobes can be suppressed to 12 dB at 6.9 GHz while the length is $2\lambda_0$. All of the aforementioned designs require a large length, at least $2\lambda_0$, and complicated structure hindering their use in practical applications.

Beam steering is often required in many scenarios. It can be achieved using different antenna types, such as phased arrays and electronically steered parasitic array radiator; however, such structures require phase shifters or complex feeding structures. Because of their strong beam-scanning capability, different beam-scanning LWA designs have been reported in the literature [7]–[15].

High beam steering in Fabry–Perot LWA is claimed in the study by Ghasemi *et al.* [7]. Continuous beam scanning from backward to forward is realized using substrate integrated waveguide (SIW)-based LWAs [8]. An LWA with beam steering capability based on the metamaterial transmission line concept has been designed in the study by Symeonidou and Siakavara [9]. A compact bidirectional LWA based on TE₂₀ mode SIW is proposed for operation at X-band [10]. Recently, a periodic-LWA based on SIW has been proposed for the beam scanning of circularly polarized waves [11].

In this letter, our objective is to design an MLWA with the following features:

- 1) reduced sidelobe level (SLL);
- 2) increased frequency-scanning capability;
- 3) compact and smaller size;
- 4) symmetric radiation pattern.

The remaining letter is organized as follows. In Section II, design and theory of the three designs—LWA with asymmetric Yagi element, LWA with symmetric Yagi elements, and tapered LWA with slots—are discussed. In Section II, simulation and measurement results for all the three designs are presented and compared. Conclusion is drawn in Section IV.

II. THEORY AND DESIGN

An MLWA with asymmetric Yagi-like elements was reported by Chiou *et al.* [15]. The design consists of a typical microstrip leaky section that is amended with a monopole and directors. This whole structure can be seen as an MLWA with asymmetric Yagi elements. This structure along with its ground plane is depicted in Fig. 1(a). When a simple LWA is excited, without monopole and Yagi elements, the power leaks out of the leaky

Manuscript received December 6, 2017; revised January 17, 2018 and February 13, 2018; accepted February 14, 2018. Date of publication March 20, 2018; date of current version May 3, 2018. The work was supported in part by the National Natural Science Foundation of China under Grant 61671349, and in part by the Fundamental Research Funds for the Central Universities under Grant JB180205. (Corresponding author: Xiaodong Yang.)

S. A. K. Tanoli and M. I. Khan are with the Department of Electrical Engineering, COMSATS Institute of Information Technology, Attock 45550, Pakistan (e-mail: shujattanoli@gmail.com; engr_mikhan@yahoo.com).

Q. Fraz is with the Department of Electrical Engineering, COMSATS Institute of Information Technology, Attock 43600, Pakistan (e-mail: q1faraz@gmail.com).

X. Yang is with the School of Electronic Engineering, Xidian University, Xi'an 710071, China (e-mail: xdyang@xidian.edu.cn).

S. A. Shah is with the School of International Education, Xidian University, Xi'an 710071, China (e-mail: azizshahics@yahoo.com).

Digital Object Identifier 10.1109/LAWP.2018.2817478

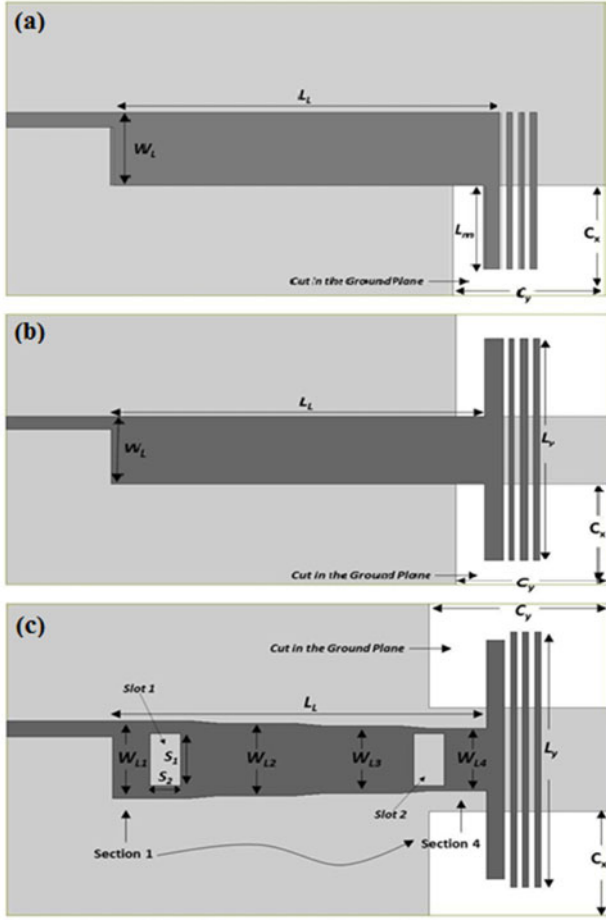


Fig. 1. MLWA (a) with asymmetric Yagi elements, (b) with symmetric Yagi elements, and (c) with tapered leaky section and slots.

section, but not 100%. The remaining power reflects back and causes the sidelobes to grow larger. By using a monopole, the reflected power can be minimized through radiation from monopole. However, it makes the radiation pattern in the xz plane asymmetric. To restore this plane and to reduce sidelobes and backlobes, we introduce an LWA with symmetric Yagi elements as depicted in Fig. 1(b).

The ground plane is also cut symmetrically. The symmetric Yagi elements along with modification in the ground plane result in a symmetric xz -plane (E -plane) radiation pattern, as shown in Fig. 2. As can be seen in Fig. 2, the radiation pattern for MLWA with symmetric Yagi elements is more symmetric than the MLWA with asymmetric Yagi elements.

To further enhance the performance of the LWA, we optimize the design of the antenna by tapering the leaky-wave section and bring two rectangular slits of equal dimensions, as shown in Fig. 1(c). The rectangular slits help to break the path of surface currents and hence reduce the SLLs further. The overall dimensions of the antenna are 60 mm in width and 100 mm ($1.8\lambda_0$) in length. All of the antenna designs shown in Fig. 1 are designed over 1.6 mm thick FR4 substrate, having relative permittivity of 4.4 and loss tangent 0.02 . Copper having conductivity of 7.8×10^7 S/m is used for the metallic part of the structure both in simulations and experiments. The proposed designs were approached through Ansoft HFSS numerical simulations, and the optimized structural parameters

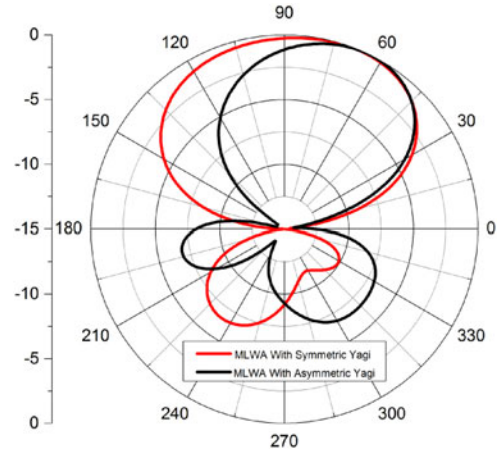


Fig. 2. xz plane (E -plane) radiation pattern for MLWA with symmetric and asymmetric Yagi elements.

TABLE I
STRUCTURAL PARAMETERS OF LWAS

Parameters	Values (mm)
L_L	75
L_y	49
L_m	17
C_x	20
C_y	30
S_1	10
S_2	05
W_{L1}	15
W_{L2}	14
W_{L3}	13
W_{L4}	12

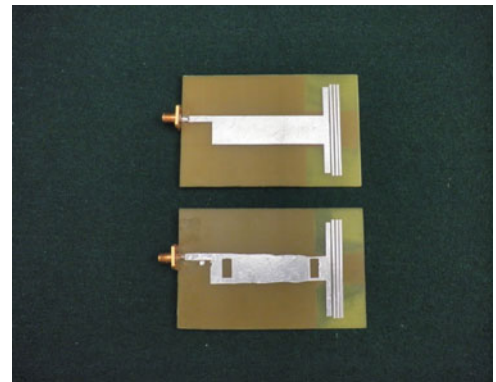


Fig. 3. Fabricated prototypes.

are shown in Table I. The designs shown in Fig. 1(b) and (c) were fabricated using the standard printed circuit board techniques. The fabricated prototypes are shown in Fig. 3.

III. RESULTS AND DISCUSSIONS

The proposed antenna structures are designed for operation in C-band. The reflection coefficients for all three MLWA designs are presented in Fig. 4. As can be seen in Fig. 4, the reflection coefficient for LWA with asymmetric Yagi elements is less than

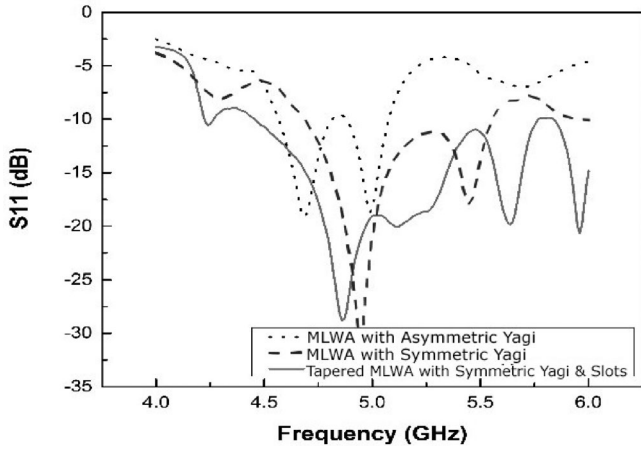


Fig. 4. Reflection coefficients for all three LWAs.

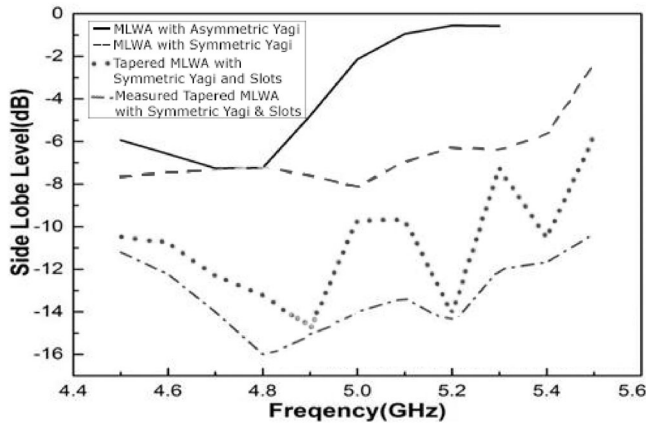


Fig. 5. SLL of LWA designs.

–10 dB over frequency range of 4.5 to 5.1 GHz. On the other hand, reflection coefficient is less than –10 dB over frequency band 4.6–5.5 GHz for LWA with symmetric Yagi elements. The bandwidth is further enhanced by tapering the leaky-wave section of the antenna resulting in an extended operating at 4.5 to 5.5 GHz.

The SLL of MLWA designs is shown in Fig. 5. It can be seen in Fig. 5 that the SLL with symmetric Yagi elements is reduced compared with that of the MLWA with asymmetric Yagi elements [15]. For the asymmetric case beyond 4.8 GHz, the SLL starts to increase and reaches to more than –2 dB at 5 GHz, whereas for symmetric case, it remains less than –5 dB throughout the working frequency band of 4.6–5.5 GHz. SLL is further suppressed and goes below –10 dB from 4.5 to 4.9 GHz when the symmetric LWA is tapered and slots are introduced. The measured values for the SLL of the optimized design (tapered LWA with slots) are less than –10 dB for the whole operating frequency band (4.5–5.5 GHz).

The simulated radiation pattern in the yz plane for the MLWA with symmetric Yagi elements for different frequencies is shown in Fig. 6. It is clear from Fig. 6 that the beam scans from 22° to 70° over a frequency range of 4.7 to 5.4 GHz.

Measured results for the frequency scanning of MLWA with slots and symmetric Yagi elements are shown in Fig. 7. The

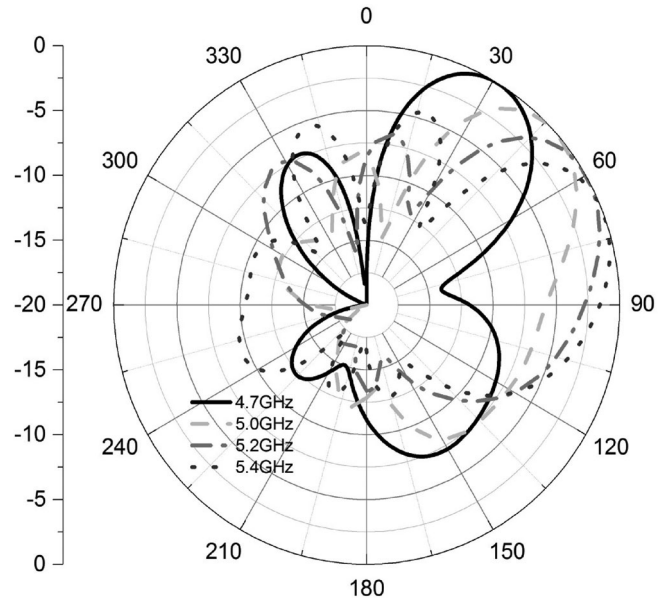


Fig. 6. Normalized simulated yz plane pattern of MLWA with symmetric Yagi elements.

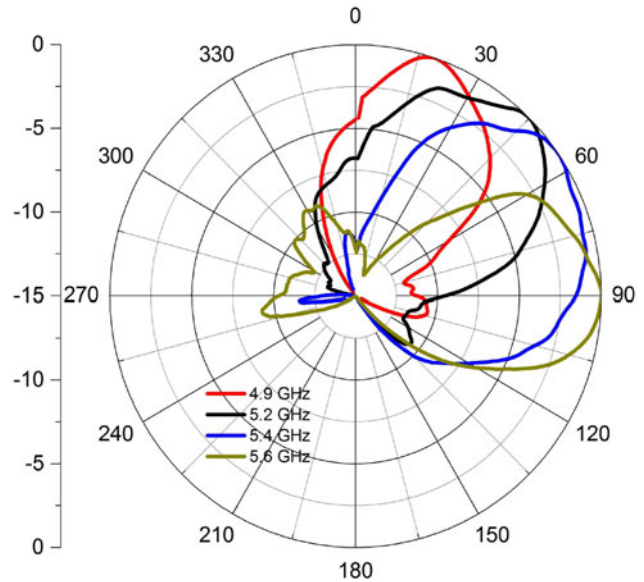


Fig. 7. Measured yz plane of tapered MLWA with slots and symmetric Yagi elements.

polar plot shows that the beam scans from 17° at 4.9 GHz to 90° at 5.6 GHz.

The beam-scanning capability of all three LWAs has been presented in Fig. 8 for comparison. It can be seen in Fig. 8 that the widest beam-scanning capability is demonstrated by the tapered LWA with slots. The beam scans almost linearly from 12° to 90° when the frequency goes from 4.5 to 5.5 GHz, achieving a total scan of 78° .

The realized gain of all three antenna designs is presented in Fig. 9. It can be seen in Fig. 9 that the gain of the MLWA with symmetric Yagi elements is larger than the gain of MLWA with asymmetric Yagi elements for frequencies beyond 4.6 GHz.

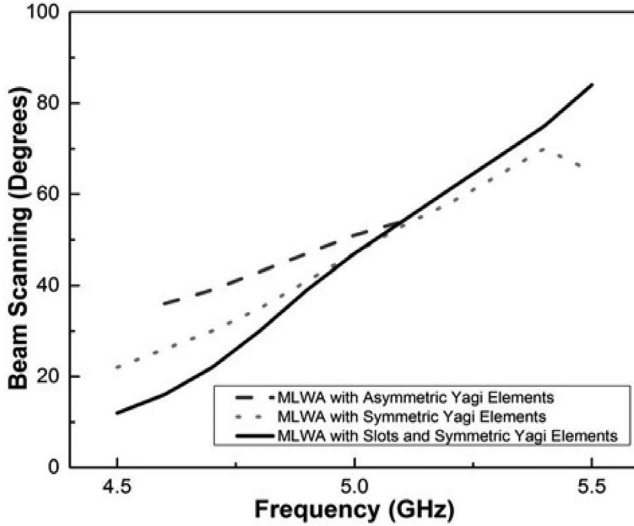


Fig. 8. Beam-scanning comparison of different MLWAs.

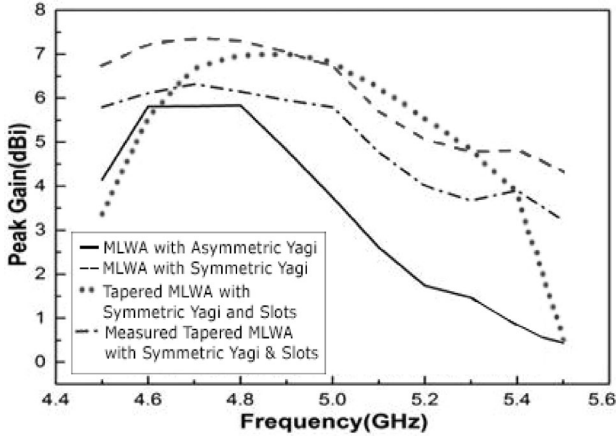


Fig. 9. Gain of different LWAs.

TABLE II
OVERALL PERFORMANCE OF MLWAS

Antenna Type	Working Frequency Band (GHz)	Beam Scanning (Degrees)	Average SLL (dB)
MLWA with asymmetric Yagi elements	4.6–5.1	36°–54°	–4
MLWA with asymmetric Yagi elements	4.6–5.5	22°–70°	–6
Tapered MLWA with slots and symmetric Yagi	4.5–5.5	12°–90°	–10

The gain is further improved for the tapered MLWA with slots and symmetric Yagi elements. Fig. 9 shows that the peak gain of the said antenna remains in acceptable range of 3.8–6.1 dB throughout the working frequency band of 4.5–5.5 GHz. The efficiency of the tapered LWA ranges from 70% to 80%. The gain of the prototype antenna is measured in an anechoic chamber using three-antenna method given in the study by Balanis [16].

All three designs are compared in Table II. It is clear from Table II that the bandwidth, beam-scanning capability, and

average SLL are significantly improved as we optimize the design from LWA with asymmetric Yagi to the tapered LWA with slots and symmetric Yagi elements.

IV. CONCLUSION

A compact MLWA with reduced SLL and increased linear frequency-scanning capability was proposed. Symmetric Yagi elements were used to reduce the SLL and make the radiation plane symmetric. The frequency-scanning capability was further enhanced in addition to reduction in SLL by tapering and introducing two slots in the leaky section. MLWA with slots and symmetric Yagi elements exhibits an almost linear and broader beam scanning (12°–90°) behavior with increasing frequency from 4.5 to 5.5 GHz. Antenna gain remains in an acceptable range of 3.8–6.1 dB throughout the working band. Measured results showed that the sidelobe is suppressed to less than –10 dB in the whole operating band (4.5–5.5 GHz). All these improvements were achieved by keeping the overall size of the antenna smaller by $1.8\lambda_0$. The fabricated design was validated through experimental measurements that were consistent with simulations.

REFERENCES

- [1] W. W. Hansen, “Radiating electromagnetic waveguide,” U.S. Patent 2 402 622, 1940.
- [2] J. du Preez and S. Sinha, “Leaky-wave antennas, in *Millimeter-Wave Antennas: Configurations and Applications*. Berlin, Germany: Springer, 2016, pp. 19–38.
- [3] C. A. Balanis, “Leaky-wave antennas,” in *Modern Antenna Handbook*, D. R. Jackson and A. A. Oliner, Eds. Hoboken, NJ, USA: Wiley, 2007, ch. 7, pp. 325–367.
- [4] D. R. Jackson, C. Caloz, and T. Itoh, “Leaky-wave antennas,” *Proc. IEEE*, vol. 100, no. 7, pp. 2194–2206, Jul. 2012.
- [5] F. Xu and K. Wu, “Understanding leaky-wave structures: A special form of guided-wave structure,” *IEEE Microw. Mag.*, vol. 14, no. 5, pp. 87–96, Jul/Aug. 2013.
- [6] W. Menzel, “A new traveling-wave antenna in microstrip,” *Arch. Elek. Uebertragung.*, vol. 33, pp. 137–140, 1979.
- [7] A. Ghasemi, S. N. Burokur, A. Dhoubi, and A. de Lustrac, “High beam steering in Fabry–Pérot leaky-wave antennas,” *IEEE Antennas Wireless Propag. Lett.*, vol. 12, pp. 261–264, 2013.
- [8] Y. L. Lyu *et al.*, “Leaky-wave antennas based on noncutoff substrate integrated waveguide supporting beam scanning from backward to forward,” *IEEE Trans. Antennas Propag.*, vol. 64, no. 6, pp. 2155–2164, Jun. 2016.
- [9] A. Symeonidou and K. Siakavara, “A novel microstrip antenna array with metamaterial-based electronic beam steering at 2.4 GHz,” *Prog. Electromagn. Res. C*, vol. 38, pp. 27–42, 2013.
- [10] A. Sarkar *et al.*, “Bi-directional SIW leaky-wave antenna using TE₂₀ mode for frequency beam scanning,” *Electron. Lett.*, vol. 53, pp. 107–109, 2017.
- [11] Y. L. Lyu, F. Y. Meng, G. H. Yang, D. Erni, Q. Wu, and K. Wu, “Periodic SIW leaky-wave antenna with large circularly polarized beam scanning range,” *IEEE Antennas Wireless Propag. Lett.*, vol. 16, pp. 2493–2496, 2017.
- [12] O. Losito, “A novel tapered leaky-wave antenna,” in *Proc. Loughborough Antennas Propag. Conf.*, 2008, pp. 145–148.
- [13] L. Liu, C. Caloz, and T. Itoh, “Dominant mode leaky-wave antenna with backfire-to-end-fire scanning capability,” *Electron. Lett.*, vol. 38, no. 23, pp. 1414–1416, Nov. 7, 2002.
- [14] C. M. Segura, A. P. Feresidis, and G. Goussetis, “Bandwidth enhancement of 2-D leaky-wave antennas with double-layer periodic surfaces,” *IEEE Trans. Antennas Propag.*, vol. 62, no. 2, pp. 586–593, Feb. 2014.
- [15] Y.-L. Chiou, J.-W. Wu, J.-H. Huang, and C. F. Jou, “Design of short microstrip leaky-wave antenna with suppressed backlobe and increased frequency scanning region,” *IEEE Trans. Antennas Propag.*, vol. 57, no. 10, pp. 3329–3333, Oct. 2009.
- [16] C. A. Balanis, *Antenna Theory Analysis and Design*, 3rd ed. Hoboken, NJ, USA: Wiley, 2005.